

# Application Note



## Instrument Landing System (ILS) and Distance Measuring Equipment (DME) Ground Receiver and Monitor Alarm Testing



Ensuring the safe guidance and exact positioning of air traffic is dependent upon regular and accurate testing of the ILS and DME monitor alarms that provide early indication of faults or changes in the operating characteristics. This application note discusses both these systems and describes how the 2030 Series avionics signal generators may be used to maintain their operational integrity.

## Instrument Landing System - ILS

Instrument Landing Systems (ILS) are installed at major airports throughout the world. The system ensures the safe approach of aircraft in congested airspace and is essential for continuous operation in low visibility and adverse weather conditions. The system is comprised of two parts -the Localizer that controls the horizontal alignment and the Glideslope that controls the angle of approach.

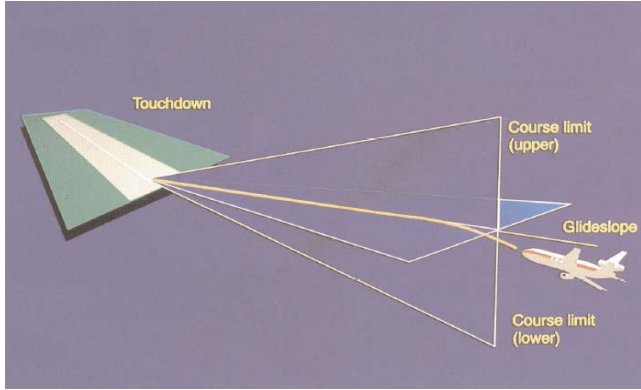


Figure 1 - Glideslope course width alarm limits

In order that the integrity of the radiated beams are maintained in operation, the ILS includes comprehensive monitors that alert operations staff when changes in the beam characteristics exceed predetermined limits. Changes can be caused by:

- transmitter faults or drift
- antenna damage
- interfering signals
- environmental disturbances
- multi-path effects

For example, a vehicle parked or moving in the vicinity of the antenna system can cause a temporary disturbance of the transmitted beam. In order to ensure the accurate guidance of air traffic approaching the airport it is essential that the monitor alarm levels are periodically checked, and re-aligned if necessary. The type and complexity of ILS monitor systems varies depending upon the regulations set by the local civil aviation authorities, the category of operation and the system manufacturer. The system typically includes integral monitors that form part of the system antenna installation, and near and far field RF monitors that operate from separate antenna placed at strategic points in the radiated beam. The performance of the ILS system is designated as Category I, II and III, with the tightest limits being set on the Category III systems (there are sub-categories for these systems which depend upon other systems being present).

ILS Category	Localizer DDM limit	$\mu\text{A}$ Deflection	Avionics Signal Generator DDM limit DDM accuracy at DDM limit
Cat I	0.015	14.5	$\pm 0.00060$
Cat II	0.011	10.6	$\pm 0.00052$
Cat III	0.009	8.7	$\pm 0.00048$

Independent monitors are provided for the localizer and glideslope and each typically provides alarms for; Displacement Sensitivity, Course Sector Difference Depth of Modulation (DDM), Course Line DDM, Clearance, Sum Depth of Modulation (SDM), Identity Keying and RF Field Level.

## ILS Waveform Generation

The 2030 Series avionics signal generators include the capability of generating very accurate ILS signals. A large LCD panel and soft key controlled operator interface, together with special firmware, present the operator with easy to use test facilities. ILS parameters are presented in terms familiar to the avionics engineer such as SDM and DDM. These parameters can be quickly set to the monitor alarm settings using the keyboard and adjusted with the rotary control or increment keys. The extensive non-volatile memory facilities for storage of the signal generator parameters and alarm parameters enable semi-automatic testing of the monitor system, providing repeatable results and significantly speed up the test routine. A PC based software support package is also available to aid report generation and the storage of ILS system parameters.

## ILS Monitor Alarm Testing

In order to test or calibrate the monitor system an accurate RF ILS signal must be applied to the monitor's receiver. The monitors are not placed directly on the approach path so they receive signals that typically have non-zero DDM's and different modulation depths compared to that seen by an approaching aircraft. The installation is normally checked by flight tests and once the system integrity has been verified the monitor signal levels are noted and used as reference values for each monitor point.

As each monitor point is expected to receive this signal, the alarms are set so that the operators are alerted if the signal deviates from this reference value. The monitors can be tested by replacing the off air signals with the 2030 avionics signal generator whose parameters can be adjusted to simulate the required off air signal and then deviated from it so that the alarms are tripped. As these parameters are adjusted from the expected signal the metering circuits, indicators and alarm circuits can be verified.

The method of ILS waveform generation ensures that accurate SDM and DDM performance is achieved. This is described in a separate application note.

The use of 2030 Series avionics signal generators in the checking of alarms results in a reduction in the number of routine flight tests that are performed and gives an early indication of faults or changes in the alarm system.

## Distance Measuring Equipment - DME

The DME system has two physically separated sub-systems, an airborne interrogator and a ground transponder. The system provides the aircraft with distance information from a ground station. The distance between the aircraft and the station is the slant range distance (i.e. line of sight) and not the horizontal distance. Paired pulses, at a specific spacing, are sent out from the aircraft (interrogator) and are received at the ground station. The ground station (transponder) then transmits paired pulses back to the aircraft at the same pulse spacing, but on a different frequency. The time required for the round trip for this signal exchange is measured in the airborne DME unit and is translated into distance (nautical miles) from the aircraft to the ground station. A correc-

tion factor is applied during the translation to cater for the ground station processing delay.

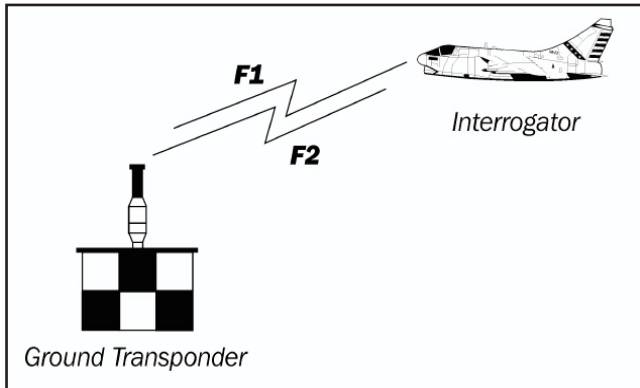


Figure 2 - Distance Measuring Principle

Two types of DME are used, DME/N for en-route and terminal applications, and precision DME/P used on airfield approach. 2030 Series avionics signal generator with DME capability As stated previously, the interrogation signals use pairs of pulses that have a defined spacing. The DME option provides the capability of generating Gaussian shaped RF pulses. Variable control of pulse width, rise and fall times, pulse pair spacing and repetition rate are available giving complete flexibility when defining the required pulse profile. The Gaussian shaped pulses can be generated over the DME range 960 to 1215 MHz with identical amplitude and shape, and level accuracy of 0.5 dB over the range -110 to +10 dBm.

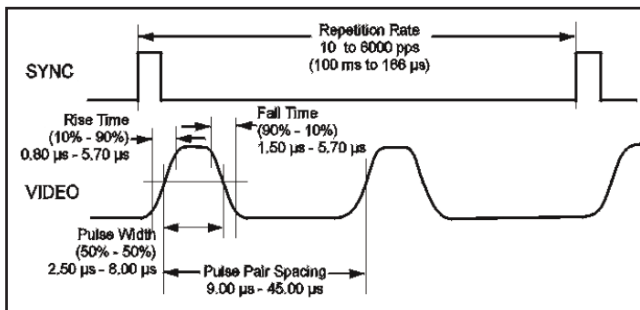


Figure 3 - Pulses definition in the 2030 signal generator

To be compatible with the ICAO standards recommended in Annex 10, DME ground equipment has to conform to the Eurocae ED57 Minimum Operational Performance Specification (MOPS). This ensures that accurate guidance information is provided and maintained. As with ILS, alarm monitoring is used. The following describes how the 2030 Series avionics signal generators, fitted with the DME option, can be used to perform a number of receiver tests and monitor alarm checks.

### Receiver and Sensitivity Tests

The receiver sensitivity is measured at the DME ground station cabinet antenna input connector. The sensitivity is specified to be at least equal to the figures quoted below (derived from ICAO Annex 10).

Equipment Type	Signal Level, (dBm)	Reply efficiency (%)
DME/N en-route	-91	70
DME/N terminal	-81	70

The pulse shape of the interrogation test signal has to conform to the DME standard characteristics in duration, rise/fall times and spectrum while performing the tests. The sensitivity must not vary by more than 1 dB for a reply rate between 0 and 2400 pp/s. For high capacity transponders, it must not vary by more than 3 dB between 2400 pp/s and 3600 pp/s. The threshold sensitivity must not change by more than 3 dB for an interrogation frequency drift to  $\pm 100$  kHz from the assigned channel frequency and for the maximum receiver frequency drift.

The receiver bandwidth must be such that for interrogation signals with a rise time between 0.8 and 3  $\mu$ s the sensitivity figures are met. When the carrier frequency of interrogation signals is more than 900 kHz from the nominal channel frequency at the cabinet input, these signals must not trigger the transponder. Input signals at the receiver image frequency and all other spurious within the 960 MHz to 1215 MHz band have to be attenuated by at least 75 dB.

### Monitor characteristics

For monitoring purposes, the transponder is interrogated by test signals that simulate the air-to-ground interrogation. The monitor then checks the pulses emitted by the transponder. In case of faulty parameters, alarms are triggered to allow standby equipment switching. The alarms must be triggered if the time between pulses deviates from the nominal value by more than  $0.4 \pm 0.1 \mu$ s for DME/N. They also need to be triggered if the designated carrier varies by more than  $\pm 0.0002\%$  from its nominal value.

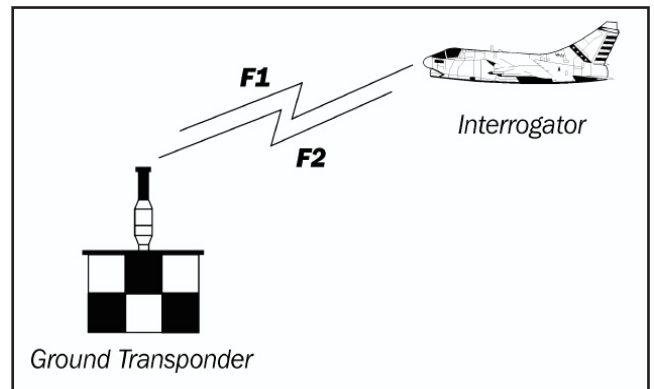


Figure 4 - Typical test setup

### Summary

In addition to the 2030 Series, the avionics option is also available on the 2040 (low noise) and 2050 (digital and vector) Series of signal generators.

The 2030 Series signal generators are used extensively for checking airfield ILS monitor systems to make sure the automatic alarm systems are working correctly. It is also used to check the calibrated receivers that are installed on flight inspection aircraft that perform tests of ILS installations. Manufacturers and aircraft work-

shops use the 2030 Series to check the performance of aircraft ILS, VOR and VHF radios. In manufacturing the excellent accuracy of the RF output signal ensures that the 2030 Series signal generators meet even the most demanding applications. When fitted with the DME option, interrogator signals can be simulated for the testing of transponder receivers.

The 2040 Series signal generators provide very low noise signals that can test the selectivity of aircraft receivers in the presence of other signals. The low phase noise of the 2040 Series ensures the test results are not influenced by limitations in the signal generator noise, particularly at offset frequencies of between 6 kHz and 30 kHz. As the aviation frequency bands become more crowded the performance level required of both the navigation receivers (ILS, VOR) and the radio systems become more critical, making it essential that adjacent channel rejection and blocking tests are performed.

The 2050 Series signal generators are capable of generating signals conforming to the VDL standards with low levels of adjacent channel power, extending the application of the generator to digital avionics receivers.

Model Number	Versions
2030, 2040, 2050 2031, 2041, 2042 2032, 2042, 2052	10 kHz to 1.35 GHz Signal Generator 10 kHz to 2.7 GHz Signal Generator 10 kHz to 5.4 GHz Signal Generator
Option 001 Option 006 Option 010* NAV 750C	Second Internal Modulation Oscillator Avionics (must be ordered with Option 001) DME (requires option 001 & 006) 2030 fitted with Option 1 and 6 only
Other Options	
Option 002 Option 008 Option 009* Option 012 Option 112	Pulse Modulation RF Profile and complex sweep Internal Pulse Electronic Attenuator Ext. mod 2 Input 600

\* Only available on 2030 series.

## SPECIFICATION

The following specifications are in addition to the overall specification for the 2030/40/50 Series signal generators.

### Avionics Specification - Option 1 & 6

#### ILS MODE

##### Tone Frequencies

90 Hz, 150 Hz nominal. The tone frequency may be changed by varying the ILS repetition rate of 30 Hz in 0.1 Hz steps. Tone frequencies maintain 3:1 and 5:1 relationships with the ILS rate.

##### Frequency Accuracy

As frequency standard

##### Tone Suppression

Either tone can be suppressed

##### Additional Modulation

Available for 0% DDM from an internal or external modulation source

#### SUM OF DEPTH OF MODULATION (SDM)

##### SDM Range

0 to 99.9% in 0.1% steps representing the arithmetic sum of each tone depth

##### SDM Selection

By keyboard entry of data and variation by UP/DOWN keys or rotary control

##### RF Accuracy of SDM

$\pm 2\%$  of SDM setting for carrier frequencies up to 400 MHz (from 100 MHz to 400 MHz with Option 12)

At 40% SDM accuracy is  $\pm 0.8\%$  depth

At 80% SDM accuracy is  $\pm 1.6\%$  depth

#### DIFFERENCE IN DEPTH OF MODULATION (DDM)

##### DDM Range

0 to 20% in 0.01% steps

20 to 99.9% in 0.1% steps

##### DDM Selection

By keyboard entry of depth in %, mA or index and variation by UP/DOWN keys or rotary control

##### RF Accuracy of DDM

$\pm 0.02$  of DDM setting  $\pm 0.0003$  DDM (0.03% depth)

At 0 DDM (on course) accuracy is  $\pm 0.0003$  DDM (0.03% depth)

At 0.155 DDM accuracy is  $\pm 0.0034$  DDM (0.34% depth)

##### LF Output

Available from the LF Output connector

##### LF Accuracy of DDM

Equivalent to  $\pm 0.0003$  DDM  $\pm 0.005$  of setting

At 0 DDM (on course) accuracy is  $\pm 0.0003$  DDM

## MARKER BEACON MODE

---

Provides default carrier of 75 MHz, 95% AM depth and a modulation frequency of 400 Hz, 1.3 kHz or 3 kHz corresponding to Outer, Middle and Inner Markers.

Carrier frequencies, AM depth and modulation frequency can be adjusted from the default values.

## VOR MODE

---

### Selection

By keyboard entry of depth and variable by UP/DOWN keys and rotary control

### Bearing Control

Relative phase of 30 Hz tone and subcarrier modulation adjustable from 0° to 359.9° in 0.01° steps by entering VOR bearing. Bearing can be entered as TO or FROM the beacon.

### Bearing Accuracy

±0.05°

### Additional modulation

Available on 0° bearing from an internal or external modulation source

### AM Depth Accuracy

±3% of setting ±0.5% for carrier frequencies up to 400 MHz (from 100 MHz to 400 MHz with Option 12)

### Frequency

The VOR repetition frequency of 30 Hz may be varied in 0.1 Hz steps. The subcarrier frequency and deviation maintain a fixed relationship with the VOR repetition rate.

### Frequency Accuracy

As frequency standard

9.96 kHz subcarrier

AM Range

0 to 49.9% depth in 0.1% steps

### Modulation

Frequency modulated by a 30 Hz tone with settable deviations of 420 Hz, 450 Hz, 480 Hz, 510 Hz and 540 Hz 30 Hz TONE

### AM Range

0 to 49.9% depth in 0.1% steps

Arithmetic sum of 30 Hz tone and subcarrier limited to 99.8%

## ADF MODE

---

Provides a default carrier of 190 kHz with 30% AM depth at a 1 kHz rate. Carrier frequency, AM depth and rate, and RF level can be varied from the default values.

## SELCAL MODE

---

Provides a facility for modulating the carrier frequency with sequential calling tones defined by the SELCAL protocol. The entry of two character pairs is permitted that define the SELCAL code generated to open the audio path of aircraft radios. Default tone duration and gap are 1s and 250 ms respectively and can be varied from nominal values.

## DME SPECIFICATION - OPTION 10

---

Specifications remain as standard 2030 Series with the following additions.

## DME MODE

---

### RF OUTPUT

---

#### Frequency Range

960 MHz to 1215 MHz

#### Level Range

-110 dBm to +10 dBm

#### Absolute Level

Accuracy Standard level error ±0.5 dB

#### Pulse Pair level Accuracy

±0.5 dB

#### ON-OFF Ratio

>80 dB

### VIDEO OUTPUT

---

#### (REAR PANEL BNC)

---

#### Pulse Characteristics

Double pulses, Gaussian shaped

#### Pulse Width

2.50 μs to 8.00 μs, resolution 50 ns

#### Rise Time

0.80 μs to 5.75 μs, resolution 50 ns

#### Fall Time

1.50 μs to 5.75 μs, resolution 50 ns

#### Pulse Pair Spacing

9.00 μs to 45.00 μs, resolution 50 ns

#### Repetition Rate

10 pp/s to 6000 pp/s

#### Level

Pseudo TTL (Typically 0 to 4.5 V, 0 to 2.5 V into 50 Ω)

### SYNC OUTPUT (REAR PANEL BNC)

---

#### Pulse Width

Typically 400 ns

#### Level

TTL (Typically 0 to 4.5 V, 0 to 2.5 V into 50 Ω)

#### Rise/Fall Time

Typically 5 ns

### EXTERNAL TRIGGER (PULSE INPUT)

---

#### Characteristics

Rising-edge, TTL level into 50 Ω

Min. pulse width 2 ns

#### Trigger to SYNC Delay

Typically 60 ns

#### Jitter

Typically 25 ns

**CHINA Beijing**

Tel: [+86] (10) 6539 1166  
Fax: [+86] (10) 6539 1778

**CHINA Shanghai**

Tel: [+86] (21) 5109 5128  
Fax: [+86] (21) 6457 7668

**FINLAND**

Tel: [+358] (9) 2709 5541  
Fax: [+358] (9) 804 2441

**FRANCE**

Tel: [+33] 1 60 79 96 00  
Fax: [+33] 1 60 77 69 22

**GERMANY**

Tel: [+49] 8131 2926-0  
Fax: [+49] 8131 2926-130

**HONG KONG**

Tel: [+852] 2832 7988  
Fax: [+852] 2834 5364

**INDIA**

Tel: [+91] (0) 80 4115 4501  
Fax: [+91] (0) 80 4115 4502

**JAPAN**

Tel: [+81] 3 3500 5591  
Fax: [+81] 3 3500 5592

**KOREA**

Tel: [+82] (2) 3424 2719  
Fax: [+82] (2) 3424 8620

**SCANDINAVIA**

Tel: [+45] 9614 0045  
Fax: [+45] 9614 0047

**SPAIN**

Tel: [+34] (91) 640 11 34  
Fax: [+34] (91) 640 06 40

**UK Cambridge**

Tel: [+44] (0) 1763 262277  
Fax: [+44] (0) 1763 285353

**UK Stevenage**

Tel: [+44] (0) 1438 742200  
Fax: [+44] (0) 1438 727601  
Freephone: 0800 282388

**USA**

Tel: [+1] (316) 522 4981  
Fax: [+1] (316) 522 1360  
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2009.

[www.aeroflex.com](http://www.aeroflex.com)  
[info-test@aeroflex.com](mailto:info-test@aeroflex.com)



Our passion for performance is defined by three attributes represented by the icons pictured above: solution-minded, performance-driven and customer-focused.